

Brass Air Vent PN16/235PSI

Threaded Ends Comply to BS21 or ANSI 2.1

Hydraulic Pressure Test	
Body	2.4Mpa/24Bar

Materials List


Part	Specification	BS EN	ASTM
Body	Brass	12164 CW603N	B16 C36000
Bonnet	Brass	12164 CW603N	B16 C36000
Float	PP	PP	PP
Lever	Stainless Steel	304 SS	304 SS
Bonnet Seal	NBR	NBR	NBR
Vent Cap	Brass	12164 CW603N	B16 C36000

Dimensions-Weights

mm		10	15	20	25
In		3/8	1/2	3/4	1
H		79	79	79	81
D		48	48	48	48
h		11	11	11	13
Weight	Lbs	0.44	0.44	0.46	0.49
	Kg	0.20	0.20	0.21	0.22



VT50
3/8" - 1"

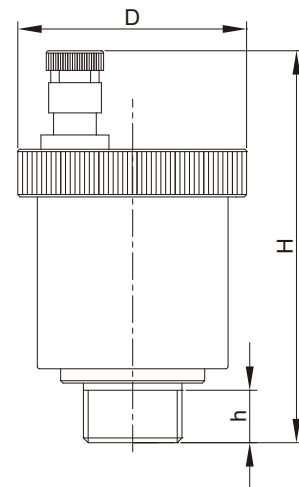

Installation tip!

Vent valves should be vertically installed on the top of piping devices.

Each TALOAR brass valve has been thoroughly cleaned and degreased and packed separately in the sealed polythene bag.